



Many large superyachts, sail and motor, are built with gate-valves to meet class/survey requirements and to allow insertion and removal of speed and depth sensors safely and with no water ingress.

A+T are the only manufacturer supplying these gate valves for refits and new-builds as well as the depth and speed sensors for them.

All valves are tested and issued with a test certificate for 5 bar of pressure. Custom length sensors can be built on request.

Range Available:



Valve compatible with SOV speed and depth sensors.



Isolation kit – used when valve is fitted to carbon, aluminium or steel hulls
Replacement for B&G 155-30-017.



Shut Off Valve Depth Sensor
170 kHz for use with B&G H2000 & H3000. Replacement for B&G 157-AA-038.




Shut Off Valve Paddlewheel Speed
Sensor Replacement for B&G 202-00-064.



Replacement Paddlewheel Kit
for A+T and B&G SOVs.

Typical Configurations

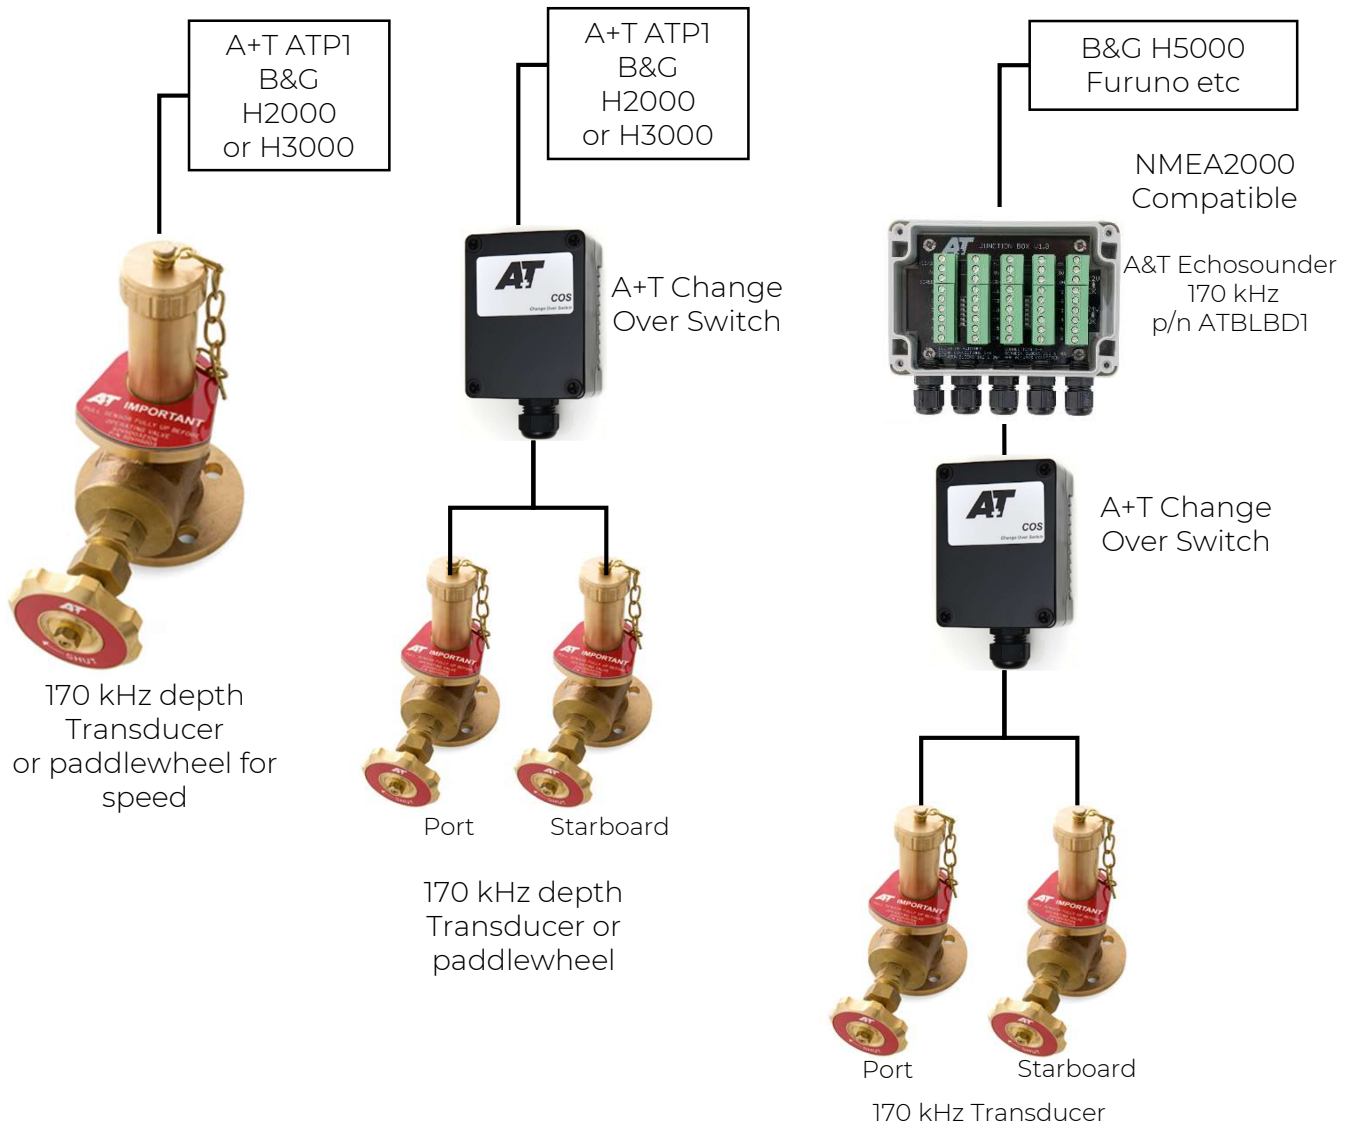

A+T offer a range of Change Over Switches, please see our website for further details:
<https://www.aandt instruments.com/products/spares-accessories/>

Warranty and support

- 1-year warranty, see details on A+T website